

POINT




1. JIS規格に準拠したU形側溝です。
2. 歩車道の区別のない路面排水用側溝として広く使われています。

▶ 側溝・道路用製品

U字溝

◆ 道路用上蓋式U形側溝 JIS A 5372 I類

形状図

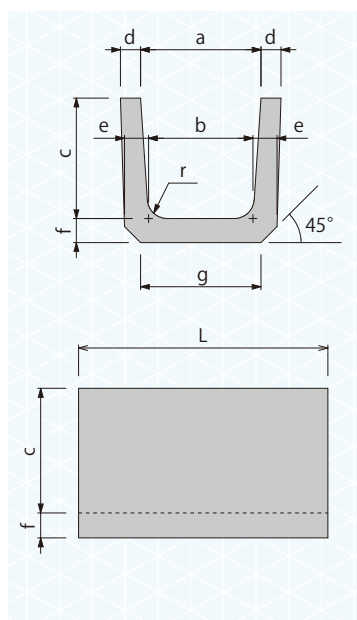


寸法表

呼び名	寸法 (mm)								参考重量 (kg)		
	a	b	c	d	e	f	g	r		L	
90規格外	90	80	90	22	27	28	120	30	600	10	
120規格外	120	110	120	25	30	30	150			15	
150	150	140	150	30	35	35	160			25	
180	180	170	180	35	40	40	190			34	
240	240	220	240	45	50	50	240	50		55	
300A	300	260	300	50	60	60	300		2000	184	
300B									600	70	
300C									1000	80	
360A					2000	132					
360B	360	310	300	65	65	360	70	264			
										92	
										600	90
										1000	100
450	450	400	450	55	70	70		430	600	134	
							450	1000	223		
600	600	540	600	70	80	80	600	2000	446		
								600	210		
								1000	349		

◆ コンクリート蓋

形状図

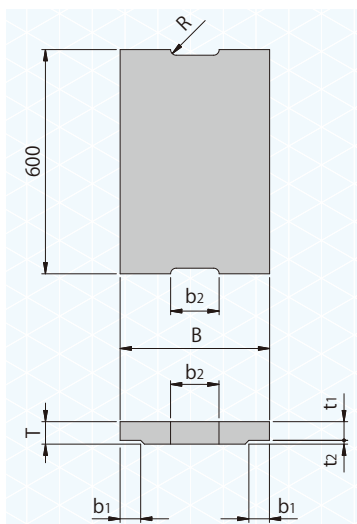

寸法表

呼び名		寸法 (mm)							参考重量 (kg)
		B	b ₁	b ₂	T	t ₁	t ₂	R	
1種 (歩道)	90規格外	130	23	75	30	25	5	15	5
	120規格外	170	28		35	30			8
	150	210	35		40	35			10
	180	250	40		45	40			14
	240	330	50	90	60	50	10	18	21
	300	400	55	100	65	55			32
	360	460		120	70	60			41
	450	560	60	150	75	65			54
2種 (車道)	600	740	75	150	75	65	10	15	77
	150	210	35	75	90	80			26
	180	250	40						31
	240	330	50	90					45
	300	400	55	100	100	85	15	18	55
	360	460		120					63
	450	560	60	120	120	100			92
	600	740	75	150	150	130			154